


Section 5 Town 6 Range 7

Oct 13 1904

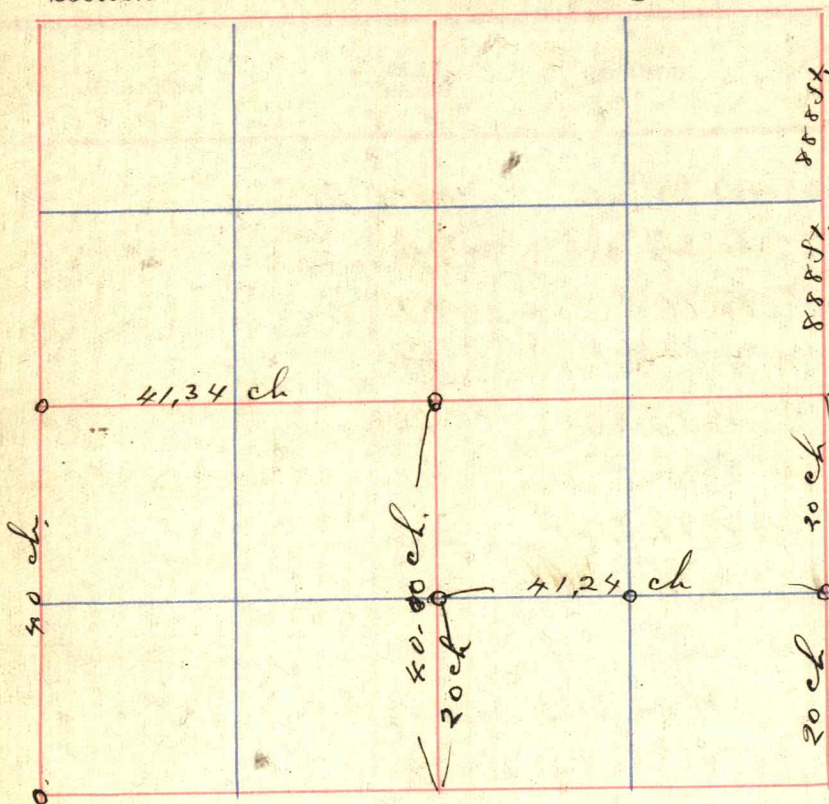

I commenced a Survey of Section 5, T. 6, R. 7
for M^r. Gooden et al

Myself and Deputy carried chain

C. B.

R. H. Blackledge
Surveyor Greene County.

Var.

Course.	Point of Beginning.	Chains Distance.	Corrected Bearings.
N	SE cor	66.76 20	
W	E 1/4	41.24	
S 1/4	N	40.	
N	Center	25.35	
W	Center	41.34	
N	SW	40.	

CORNER ESTABLISHED.	Monument.	Device.	WITNESS POINTS OR BEARING TREES.	Mark or Dia. in Inches.	COURSE.	Links Distant.	REMARKS.
6 1/4	stone		stone		North	5 ft.	old corner
6 1/4 NE	"		stone		North	9 ft	Old corner
W 1/4 S. SE	"		Stone		East	35 ft	
Center	"		White Oak	12	N 89° W	26 ft	
W 1/4 NE	"		Post	14	S 24 1/2° E	37 ft	
W 1/4	"		Stone		N	24	stone set on previous survey
			Mable	16	N 78 3/4° E	25	